



PRODUCTIVITY ENHANCEMENT SOLUTIONS

Automotive Specialist, Professional Applicators

Airflow 3™



The latest version of the Cox Airflow 3 has been ergonomically designed for outstanding comfort and ease of use. Manufactured in the UK to strict international standards, the Cox Airflow 3 provides users with the world's most comfortable and easy-to-use pneumatic sealant and adhesive applicator.



Now in its third generation, the renowned Cox Airflow range benefits from its ergonomically designed and manufactured handle and barrel strap. Additionally, the redesigned inbuilt air regulator provides the user with controlled power (three turns from zero to max) to smoothly dispense materials of varying viscosities.

Quiet in operation

Airflow 3 is ideal for environments where production and refinishing operations take place. Its inbuilt silencer lowers the noise level of the applicator to less than 70dB.

Precise control and ease of use

Airflow 3 can effortlessly dispense a wide range of low to high viscosity sealants contained in cartridges, sachets or pouches. The lightweight, lightly textured handle and well-balanced barrel make Airflow 3 easy-to-use – a matter of particular importance for operators who use the applicator above shoulder height or for extended periods.



Regulators

Standard: 6.8 bar (100 psi)

Options available: 3.4 bar (50 psi)

5.2 bar (75 psi)

8.5 bar (125 psi)

Colour of plug denotes regulator value



Precise control for smooth material flow




Ergonomically designed for comfortable use



Built-in silencer for a user friendly work environment (less than 70dB)



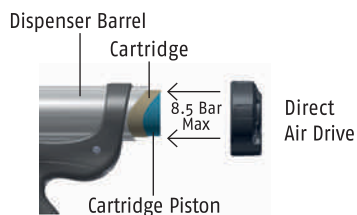

Airflow 3™ CARTRIDGE


- Low – medium viscosity
- Compact applicators – ideal for tight spaces
- 6.8bar (100psi) regulator



310ml
400ml

1.5kN
1.5kN

600g
770g

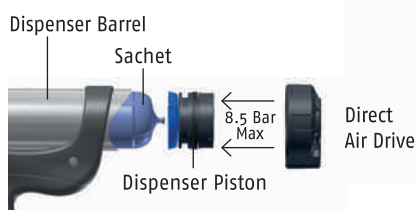

Airflow 3™ SACHET


- Low – medium viscosity
- For larger volume material – up to 600ml sachets
- Floating plunger assembly – relatively small waste of material
- 6.8bar (100psi) regulator (others are available)



310ml
400ml
600ml

1.5kN
1.5kN
1.5kN

780g
800g
820g

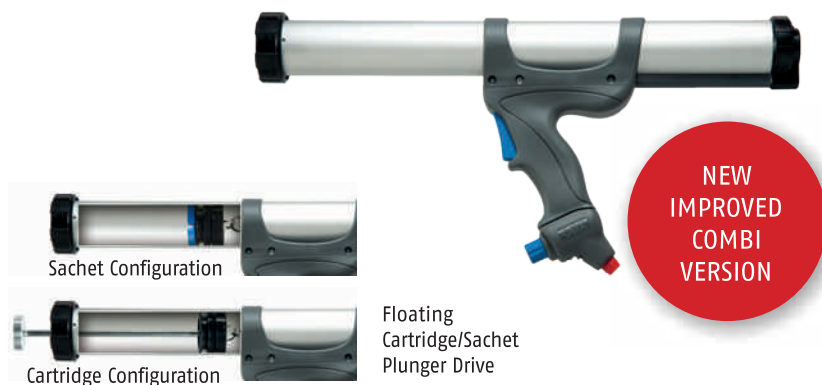

Airflow 3™ COMPACT COMBI NEW IMPROVED

- Low – medium viscosity
- Shorter than Combi version – for easier use
- Lightweight as only one barrel
- Versatile tool for cartridges and sachets
- 6.8bar (100psi) regulator (others are available)




310ml
400ml
600ml

310ml

1.5kN

993g

Not for 400ml cartridges (see Airflow 3 Combi 400ml)

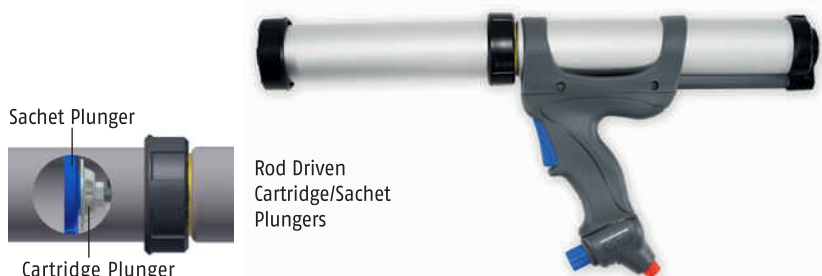

Airflow 3™ COMBI 400ml

- Low – medium viscosity
- 6.8bar (100psi) regulator (others available)
- Double barrel; rod driven



400ml

400ml

1.5kN

1206g




Airflow 3™
COMBI HP

- Very powerful for high viscous materials
- Medium – high viscosity
- 8.5 bar (125psi) regulator

310ml 400ml	psi / bar	310ml 400ml 600ml	2.5kN		Kg
					1730g 1780g 1830g

Compressor Guide

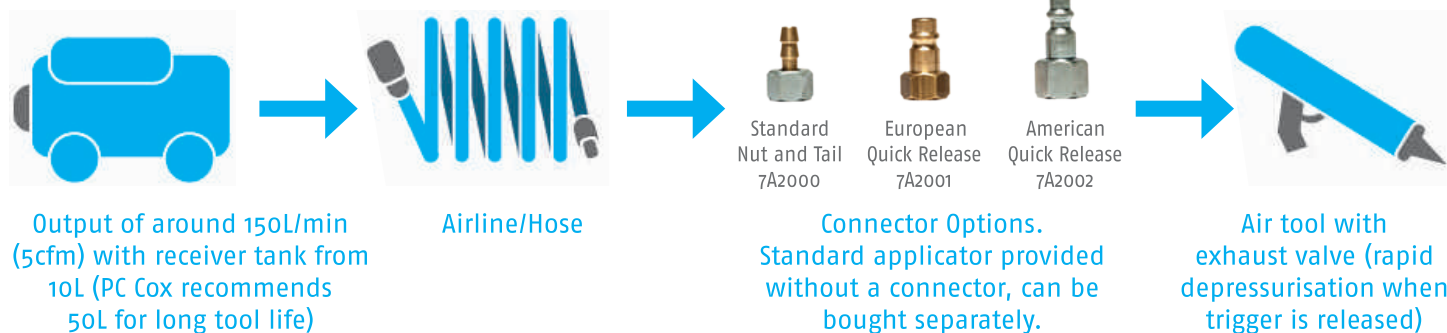

Airflow 3 – Fully standards compliant:

• ISO 12100:2010 • ISO 9001:2008 • EN 983:1996+A1:2008 • CE

C0 Accessories

A wide range of accessories are available for you to get the most from your applicator



Bespoke power and viscosity options

For different power or viscosity requirements, please contact us or visit www.pccox.co.uk

PRODUCT RANGE B POWER

